

G Cable Lasher - For Large Diameter Lashing


The largest of the GMP Lashers, this unit is designed to lash large single or combination of overhead cable up to 5 in. (127 mm) diameter to a supporting strand. Widely used for lashing single or multiple power cables.

- ▶ Lashes any cable from about 2-1/2 in. to 5 in. (64-127 mm) diameter, on strand from 11/32 in. to 3/4 in. (9-19 mm) diameters with one or two left lay spiral wrappings of .065 in. diameter stainless steel wire
- ▶ Nominal spacing between wraps is 16-1/2 in. (42 cm).
- ▶ Each lasher includes a 6 ft. (1.6 M) bridle rope assembly with snap hooks, an information and operations manual and a heavy duty storage chest

This big tough lasher has a pulling mechanism that pivots about the axis of the rear driving roller, so it always applies the right amount of hold down force. For lashing large diameter cable, it's your best choice.



P/N	Description	Wire Dia.	Weight
10500	G Cable Lasher Standard w/Chest	.065	110 lbs. (50 kgs)
10501	Chest only		39 lbs. (17.7 kgs)
10502	G Cable Lasher w/Chest Modified for 1200 ft. of .045 in. wire	.045	110 lbs. (50 kgs)
	Weight of lasher only		71 lbs. (32.2 kgs)
03165	Bridle Rope Assembly only		3 lbs. (1.4 kgs)
70190	Towing Lanyard 35 ft. (10.7 M) (optional)		6 lbs. (2.7 kg)

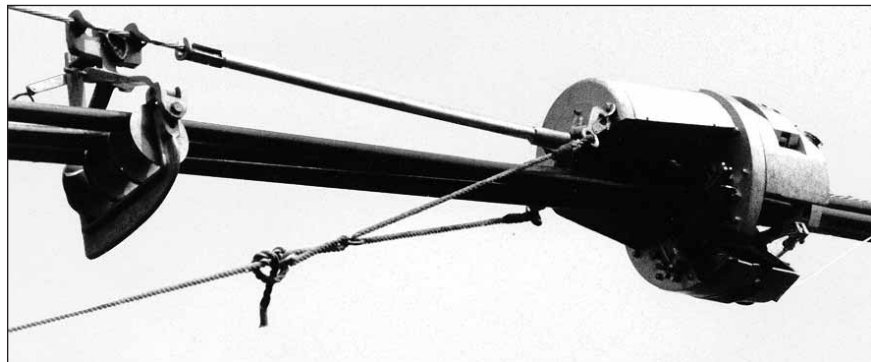

SEE ONLINE USER MANUAL