

## C Cement

An excellent, quick-drying rubber based adhesive for bonding rubber and sealing tapes and other plastic materials to polyethylene cable sheath. It's packaged in a handy 4 oz. (118 ml) can with a cap-mounted brush applicator. They are offered in a 12-can package.

Our C Cement has a shelf life of 18 months from the date of manufacture. To conserve its shelf life, it must be stored in unopened cans below 86° F (30° C) and kept away from all direct sources of heat and ignition.


P/N 71670 Weight: 4 lbs. (1.8 kg)/pkg.

**NOTE:** *Flammable liquid requires special handling during transport.*

## Rubber Splice Bandage

This versatile pure vulcanized gum rubber wrap is all you'll need for most cable splicing operations. It's supplied on a roll that measures .030 in. (.762 mm) thick x 4 in. (102 mm) wide x 14 ft. (426 cm) long.

P/N 06843 Weight: 4 oz. (.11 kg)/roll

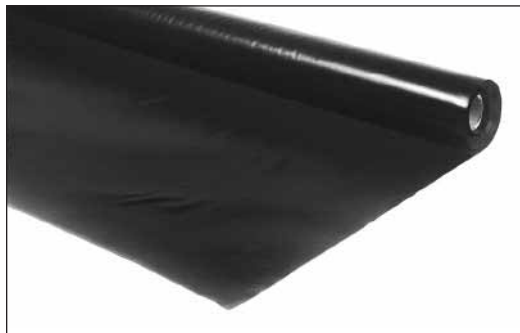

## B Splice Covering

This is a 6-mil (.15 mm), black plastic, single-ply sheeting designed for temporarily covering cable openings during splicing.

It's available in two types of packaging.

| P/N   | Description  | Weight               |
|-------|--|----------------------|
| 72030 | 48 in. (122 cm) W x 50 ft. (15 M) L                | 7-3/4 lbs. (3.5 kgs) |
| 72031 | 20 in. (51 cm) W x 24 in. (61 cm) L<br>10 pcs./pk. | 13 oz. (.37 kgs)/pk  |

## Polyethylene Tape

This 8-mil (.20 mm) thick tape is perfect when you need a finishing wrap with a high dielectric value. Not only does it provide excellent conductor insulation protection, but an extra layer of insulation as well.

The tape is available in two types of packaging.

| P/N   | Description                          | Weight           |
|-------|--------------------------------------|------------------|
| 72090 | 3 in. (76 mm) W x 35 in. (889 mm) L  | 6 oz. (.17 kg)   |
| 72091 | 3 in. (76 mm) W x 100 ft. (30.5 M) L | 1.3 lbs. (.6 kg) |

