



VATS Block

Designed with a 4-1/2 in. (114 mm) wide roller, this Cable Block is perfect for temporarily supporting Multi-Port Terminal fiber on 1/4 - 3/8 in. (6-10 mm) dia. suspension strand during new construction or while over lashing to existing lashed cable.
 P/N 70375 Weight 2.25 lbs. (1.02 kgs)




VATS Guide

VATS Guide System

This VATS Guide (70374) is designed to be used as either an in-feed guide, utilizing the Strand Bracket (70373), or as a corner guide when attached to the Pole Bracket (70372). With a 4-1/2 in. (114 mm) wide opening, it's your first choice for placing the new Multi-Port Terminal Fiber.



Pole Bracket w/ Web Strap

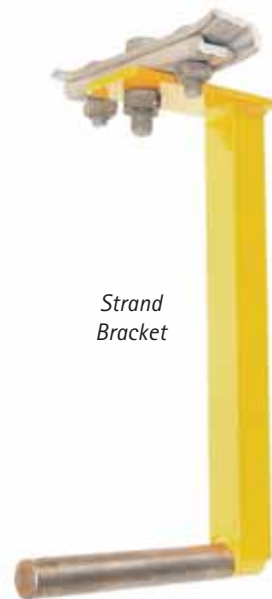

Strand Bracket

P/N	Description	Weight
70372	Pole Bracket	12.4 lbs (5.6 kg)
70373	Strand Bracket	10.2 lbs. (4.6 kg)
70374	VATS Guide	31 Lbs. (14 kg)