


B Lashed Cable Supports

When combined with Cable Spacers, these bands help support and stabilize your cable around poles or other obstructions where the messenger and cable separation doesn't exceed 3-1/4 in. (83 mm).

- ▶ Adjustable 3/4 in. (17 mm) wide stainless steel bands
- ▶ Six different standard lengths

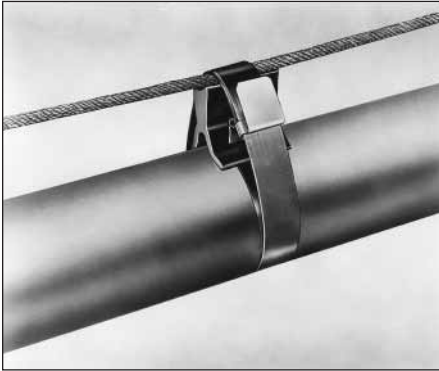

P/N	Strap Length in Inches	Wt. lbs./per 100
71691	16 in. (406 mm)	4 lbs. (2 kgs)
71692	22 in. (559 mm)	6 lbs. (3 kgs)
71693	28 in. (711 mm)	8 lbs. (4 kgs)
71694	34 in. (864 mm)	10 lbs. (5 kgs)
71695	45 in. (1143 mm)	12 lbs. (5 kgs)
71698	66 in. (1676 mm)	14 lbs. (6 kgs)

TOOLS
BUILT TO
GO THE
DISTANCE

F Slack Puller

This item is used for deflecting suspension strand temporarily to obtain sufficient slack in aerial cable to facilitate splicing and maintenance operations.

- ▶ In making a repair opening in cable that is not cut, the slack puller is used to provide sufficient slack to test, identify, and repair the conductors
- ▶ Can be used on cable supported by 6M, 6.6M, 10M, or 16M strand. May be used in operations involving lashed or ring supported cables at lead sleeves, splice closures, and cable terminals
- ▶ Attached to the frame is a shackle and safety chain tether to prevent accidental dropping from the strand

P/N 08245 Weight: 14 oz. (6 kg)

