


GMP Breeze Configuration for Cable Blowing

In order to customize your new "Breeze" to your application, we ask that you pick, one each from the lists below, the Tube Collet Assembly P/N, the Cable Guide Assembly P/N and the Cable Collet Assembly P/N.

When ordering, please have Tube and Cable dimensions available.



Tube Collet Assembly

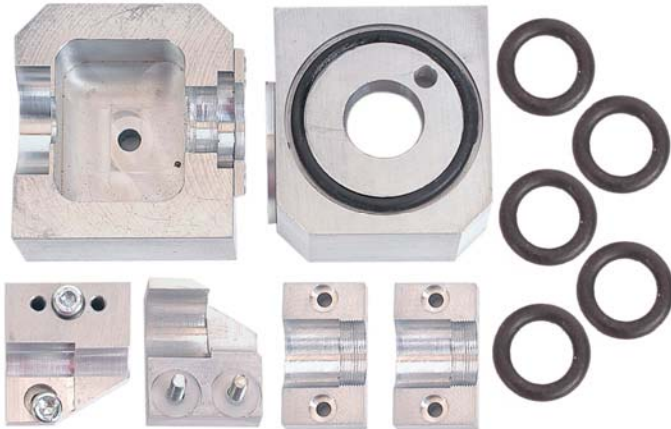

Tube O.D	P/N
4 mm	89545
5 mm	89539 (1)
6 mm	89546
7 mm	89547
8 mm	89540
10 mm	89541
12 mm	89542
12.7 mm	89543
16 mm	89544

Spare Seals
89556 (5 pack)
89549 (5 pack)
89557 (5 pack)
89553 (5 pack)
89550 (5 pack)
89551 (5 pack)
89552 (5 pack)
89552 (5 pack)
89554 (5 pack)

(1) For blown fiber conversion, see GMP P/N 89592


Cable Guide Set



Cable Size	P/N
2.5 - 3.8 mm	89520
3.8 - 8.0 mm	89521 (2)

(2) GMP P/N 89521 Required for blown fiber conversion.

Cable Collet Assembly

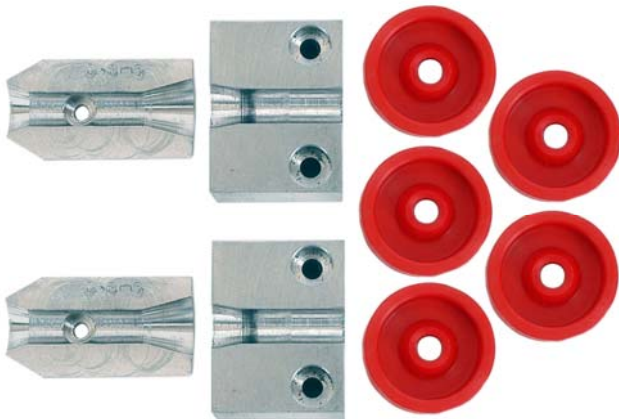

Cable Size	P/N
2.5 - 3.0 mm	89530
3.0 - 3.8 mm	89531
3.8 - 5.0 mm	89532
5.0 - 6.4 mm	89533
6.4 - 8.0 mm	89534

Spare Seals
89510 (5 pack)
89511 (5 pack)
89512 (5 pack)
89513 (5 pack)
89514 (5 pack)



General Machine Products Co. 3111 Old Lincoln Highway Trevose, PA 19053 USA
Tel: +1.215.357.5500 Fax: +1.215.357.6216 Email: info@GMPtools.com

GMP Breeze Configuration for Cable Blowing




In order to customize your new "Breeze" for Blown fiber, the kit below is required. The cable guide, P/N 89521, is required, but is sold separately.



Blown Fiber Conversion P/N 89592 Duct Size 5mm Fiber Size 1.1mm and 1.6mm diameter





Drive
Wheel Set
89589

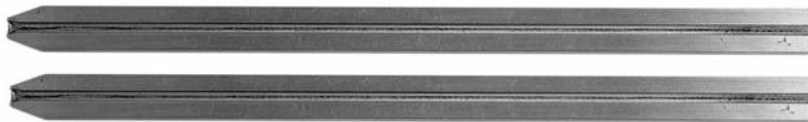


Cable
Guide Set
32875

Solid Cable
Guide
1.1mm 33087
1.6mm 33043



Split Cable
Guide
1.1mm 33090
1.6mm 33091



Airbox Set
32879

Micro Duct
Seals
89549 5/pk

Duct
Clamp Set
32874

Solid Plug
89548 5/pk

Helpful Tip



To keep from losing the split cable seal, attach a small piece of thin, double backed tape to the bottom. The seal will stay together and in place when you open the airbox.




GMP Breeze Configuration for Cable Blowing

Metal Drive Wheel Kit

Under certain conditions, e.g. in series blowing where lubricant is used, knurled metal drive wheels offer increased grip on the cable.

The kit contains a pair of knurled stainless steel drive wheels and a spring loaded mechanism which allows the drive to compensate for variances in cable diameter while applying a consistent force.

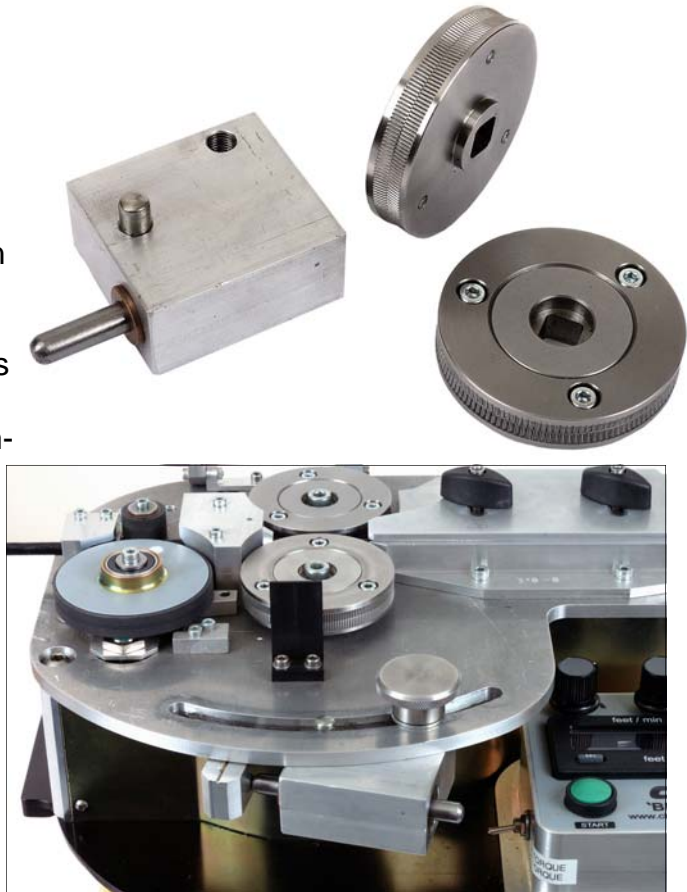

Metal Drive Wheel Kit

P/N 89692 Weight: 2.5 lbs. (1.1 kgs)

Breeze Bottled Nitrogen Kit for Blown Fiber

- Used with bottled nitrogen in place of a compressor for 5mm or smaller Microduct
- Quickly connects to the Breeze hose via a twist lock connector.
- Hose is 12 1/2 feet long for easy setups.
- The regulator has easy to read 2" gauges.
- The flexible hose is abrasion, weather and ozone resistant.
- Inlet connection is CGA 580.



Do Not Exceed the Hose Rating of 200 PSI.

Breeze Bottled Nitrogen Kit
P/N 89742 Weight: 5.5 lbs. (2.5 kgs)



CGA 580: .965"-14 NGO-RH-INT

