


GMP CABLE BLOWER COMPARISON



Breeze



Air Stream

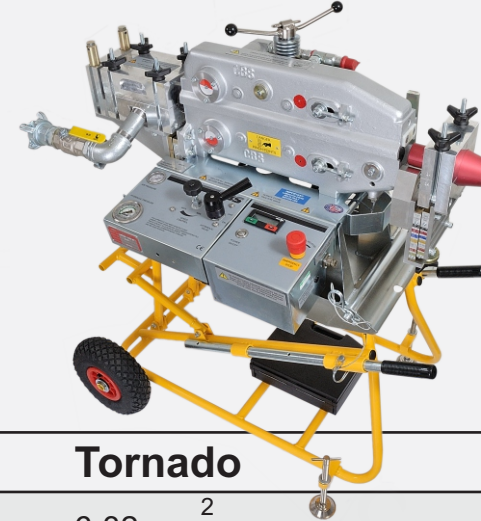

Tornado

Cable Diameter	1-8 mm ¹	2.5-11 mm	6-32 mm ²
Tube Size (OD):	5-16 mm	5-18 mm	19-63 mm
Cable Speed (Adjustable):	0-164 ft/min (0-50 m/min)	0-262 ft/min (0-80 m/min)	0-300 ft/min (0-90 m/min)
Maximum Air Pressure:	210 psi (15 bar) 30 cfm	210 psi (15 bar) 30 cfm	175 psi (12 bar) 150-450 cfm (determined by duct size)
Power Requirement:	110/220 VAC	110/220 VAC	Gas powered hydraulic power pack
Length:	15.3" (39 cm)	18.1" (46 cm)	42" (107 cm)
Width:	10.6" (27 cm)	11.8" (30 cm)	27" (69 cm)
Height:	10" (25 cm)	10.6" (27 cm)	48.5" (123 cm)
Weight:	50.6 lbs (23 kg)	31 lbs (14 kg)	155 lbs (70 kg)

¹ 1 - 2.5 mm blown fiber available with add-on kit

² Micro duct (10 & 12 mm OD) blowing available with add-on kit



GENERAL MACHINE PRODUCTS CO., INC.
3111 Old Lincoln Highway
Trevose, PA 19053
Tel: 215-357-5500
Fax: 215-357-6216
Email: info@gmptools.com
Web: www.gmptools.com