




CONNECTING YOU TO YOUR BEST FUTURE

# eCapstan

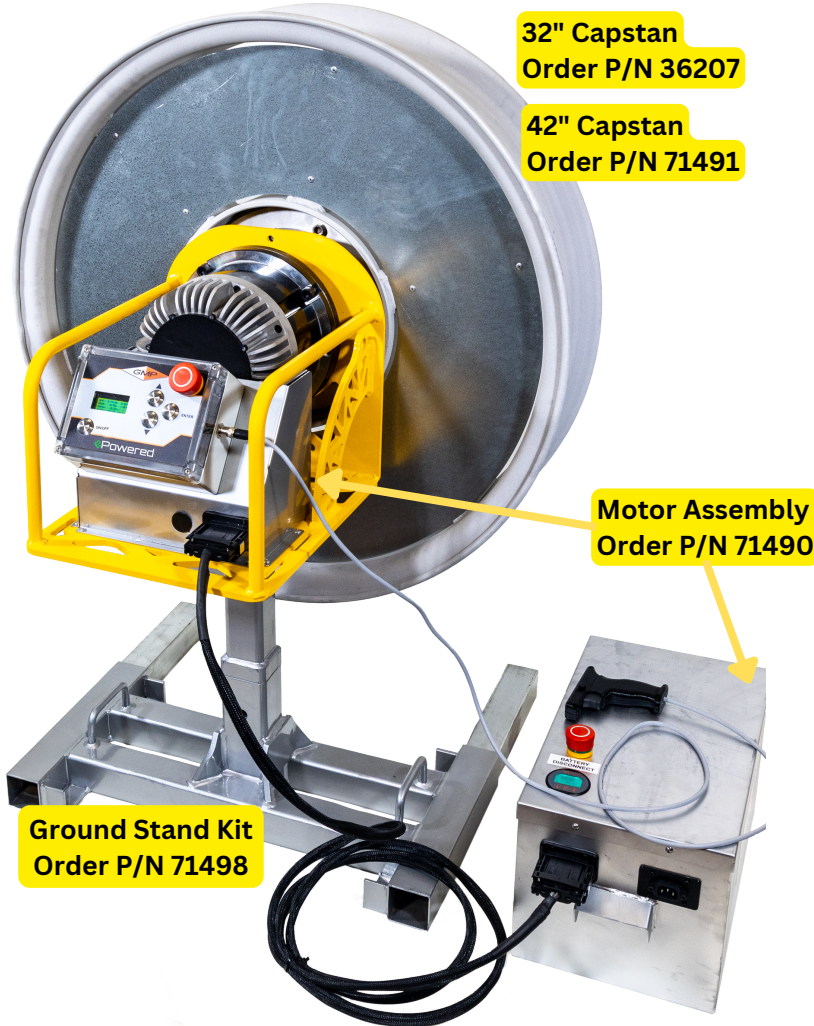

32" Capstan  
Order P/N 36207

42" Capstan  
Order P/N 71491

Motor Assembly  
Order P/N 71490

Ground Stand Kit  
Order P/N 71498



Hitch Mount Stand Kit  
Order P/N 71499

*shown with optional hitch mount*

**Clean and quiet operation is the hallmark of the eCapstan.** Up to 800 lbs of pulling force this tool will work all day on a single charge.

## FEATURES AND BENEFITS

- QUIET operation improves jobsite communication and safety
- 15,000 ft of cable pulling on a single battery charge\*
- NO engine, NO emissions
- Adjustable pulling force and speed
- Electronically controlled pulling setpoints from 0-800+ lbs
- 1 Man Operation
- Data recording of pull force during operation
- Hitch mount or ground stand capable
- Uses capstans from 25" up to 42"
- Quick push button operation to set capstan diameter, max pulling force, and pulling speed
- Winch mode pull force override if pull force setpoint cannot complete pull
- Battery life well over 2000 full charging cycles
- Uses safe LiFePO4 technology

\*Estimated based on average pull and average speed, exact distance per charge may vary

## CONFIGURING YOUR eCAPSTAN

SELECT 1 OF EACH	PART NUMBER	DESCRIPTION
1	71490	eCAPSTAN
2	36207	32" CAPSTAN
	71491	42" CAPSTAN
3	71499	HITCH MOUNT STAND
	71498	GROUND STAND

PART OF THE GMP

**Powered**  
LINE OF PRODUCTS



a **KLEIN TOOLS** company

GENERAL MACHINE PRODUCTS (KT), LLC  
3111 OLD LINCOLN HWY, TREVOSE PA 19053

GMPTOOLS.COM

215-357-5500

# SPECIFICATIONS

## Operating Capacities

Max Pulling Load:	900 lbs. (4000 N)@ 100lb setpoints
Max Pulling Speed:	250 feet/minute (76m/min)

## Battery

Battery Type:	LiFePO4
Battery Size:	48V, 40Ah
Charge Time:	8hr
Height:	11 in (280mm)
Length:	15 in (381mm)
Width:	9 in (229mm)
Weight:	43 lbs. (19.5kg)

## Operating Range

Discharge Temperature	-4°F to 130°F (-20°C to 54°C)
Charge Temperature	32° F to 114° F (0°C to 46°C)
Storage Temperature	20° F to 95° F (-7°C to 35°C)

## Replacement Parts and Accessories

40 Ah battery Pack-	<b>PN 71492</b>
Trigger controller with cord and plug-	<b>PN 71493</b>
eCapstan power cord-	<b>PN 71494</b>
Battery Charger-	<b>PN 71495</b>
Capstan mounting bolts ( 6 pack)-	<b>PN 71496</b>
Capstan mounting nuts ( 6 pack) -	<b>PN 71497</b>

## Dimensions - Tool Only

Height:	15.5 in ( 394mm)
Length:	25" (635mm)
Width:	14" (356mm)
Weight:	180 lbs. (82kg)

## Dimensions - With Ground Stand and 42 inch Capstan

Height:	53 in (1346mm)
Length:	46.75 in (1187mm)
Width:	48.5 in (1232mm)
Weight:	326 lbs. (147kg)

## Dimensions - With Hitch Mount and 42 inch Capstan

Height:	43 in (1092mm)
Length:	53 in (1346mm)
Width:	24 in (609mm)
Weight:	258 lbs. (117kg)

PART OF THE GMP

 **Powered**  
LINE OF PRODUCTS



GENERAL MACHINE PRODUCTS (KT), LLC  
3111 OLD LINCOLN HWY, TREVOSÉ PA 19053

GMPTOOLS.COM

215-357-5500