

| QTY | Part Number | Description |
|-----|-------------|------------------|
| 1 | 24646 | Seat |
| 2 | 09758 | 1/4-20x1 (a) |
| 4 | 16195 | 1/4-20x1 1/4 (b) |
| 2 | 16194 | 1/4-20x1 1/2 (c) |
| 8 | 17657 | Lock Washer |
| 8 | 05024 | 1/4x20 Sq Nut |
| 3 | | Warning Labels |

STEP 1

Remove damaged seat and related hardware. Inspect the platform carefully and look for unsatisfactory conditions such as:


- Defective hardware such as spring latches that do not operate properly
- Excessive wear such as a damaged or broken weld or bent pipe

If reliability or safety is questionable, be safe and dispose of properly and purchase a new ladder platform, GMP # 15326

STEP 2


Raise the seat on 2 wooden blocks, tread side up, with the 2 holes in the center closest to you. Start screws in the holes as illustrated in photo.

See the manual on the Ladder Platform for additional important information

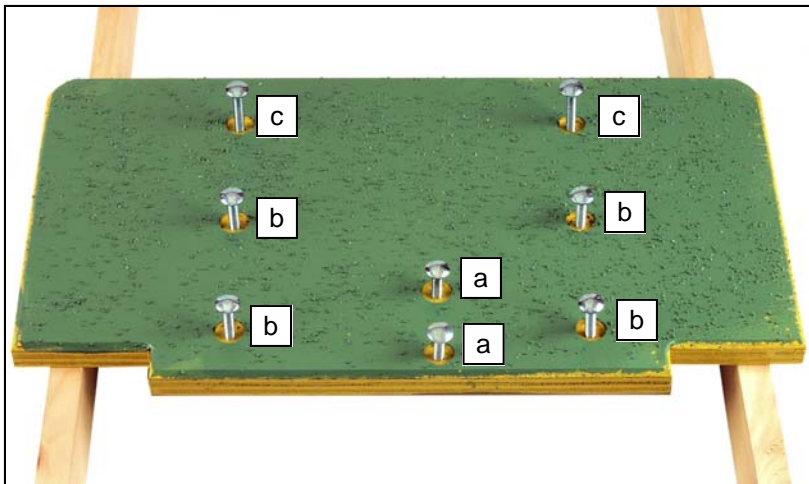

STEP 3

Tap screws flush with a hammer sinking square under head into wood.

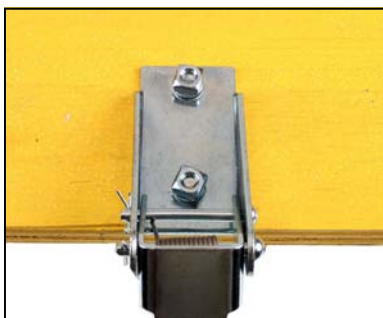

STEP 4

Turn seat over and place back on wood blocks. Install bracket and latch assembly. Fasten with lock washers, nuts and tighten to 50 inch pounds.



STEP 5

Install frame assembly and fasten with lock washers, nuts and tighten to 50 inch pounds.



STEP 6

Round over threads with a ball peen hammer on all bolts to prevent the nuts from backing off during use.