

AirStream Cable Blowing Machine

AirStream Cable Blowing Machine

The AirStream has been designed to maximize protection for microcables with a compliant double drive concept, backed by the latest technology in servo controls to provide precise control of torque and speed. Single person operation with safe, easy to operate ergonomic controls combines with low maintenance and high reliability to form the machine's key features. The AirStream is adjustable to suit a wide range of cable diameters 2.5-11mm and flat drop.

Main Features

- Automatic cable centralizing
- Synchronous high grip profiled compliant drive belts
- Tabletop design with ergonomic controls for ease of operation
- Forward and reverse
- Variable torque and speed controls
- Digital servo motor drive system
- Single person operation
- Digital cable speed and length monitoring
- Auto stop facility when air stone fitted
- Integral air valve and pressure gauge
- Easy cable threading
- Polycarbonate safety guarding
- Lightweight and compact
- Low maintenance
- Low noise levels
- Travel case

P/N 89300 AirStream Blowing Machine Weight: 31 lbs. (14kg)

P/N 89321 Plus (come with 3 cable and seal sizes)

P/N 89327 Max (comes with every available cable and seal size)

FLAT DROP
READY



Specifications

Cable Diameter:	2.5-11mm (.10 -.43")
Tube Size O.D.:	5 to 18mm (.20-.71")
Cable Speed (Adjustable):	0-262 ft/min (0-80m/min)
Air Pressure:	220 psi (15 Bar)
Power Requirement:	110/220 Volt AC
Width:	11.8" (300mm)
Length:	18.1" (460mm)
Height:	10.6" (270mm)
Net Weight:	33 lbs. (15kg)

Air Compressor For Micro Fiber Cable Blowing Machines

The Air Compressor is designed specifically for use with our Micro Fiber Cable Blowing Machines. This reliable & efficient screw compressor, powered by a gasoline engine, provides a maximum working pressure of 220 psi (15 bar) with 35.3 cfm (1000 liters/m) flow. The compressor includes an after-cooler and water separator. The output air is filtered and conditioned to optimize the performance of our micro fiber cable blowing machines. The compressor package includes a hose that connects the compressor to the after-cooler and 50 foot 3/4" diameter air hose for after-cooler connection to the microfiber cable blowing machine.

Engine:	Honda® 21 hp
Fuel Cap.:	5 gal (20 liters)
Length:	42" (1070mm)
Width:	31" (800mm)
Height:	30" (780mm)
Weight:	487 lbs. (221kg) Compressor and After-Cooler



After-Cooler and Water Separator

Order: P/N 89011 Weight: 487 lbs. (221kg)

PLUS
MAX

Up to 30% savings on accessories when purchasing the Plus or Max

P/N	COMPONENT			
TUBE COLLET AND CLAMP ASSEMBLIES (5-18MM)				
<i>CHOOSE ONE SIZE BELOW FOR STANDARD AIR STREAM</i>				
89310	Collet Assy 5MM	1		
89311	Collet Assy 7MM	1		
89312	Collet Assy 8MM	1		
89319	Collet Assy 8.5MM	1		
89313	Collet Assy 10MM	1		
89314	Collet Assy 12MM	1		
89315	Collet Assy 12.7MM	1		
89316	Collet Assy 14MM	1		
89317	Collet Assy 16MM	1		
89318	Collet Assy 18MM	1		
CABLE GUIDES (2.5-11MM)				
<i>CHOOSE ONE SIZE DUCT SEAL BELOW FOR STANDARD AIR STREAM</i>				
89305	Guide Cable Assy 2.5MM (only)	1		
89306	Guide Cable Assy 2.5-3.0MM	1		
89307	Guide Cable Assy 3.0-6.4	1		
89303	Guide Cable Assy 6.0-8.5	1		
89304	Guide Cable Assy 8.5-11.0	1		
CABLE SEALS (2.5-11MM)				
<i>CHOOSE ONE SIZE CABLE SEAL BELOW FOR STANDARD AIR STREAM</i>				
89374	Seal Cable Assy 2.5-3.0	1		
89375	Seal Cable Assy 3.0-3.8	1		
89376	Seal Cable Assy 3.8-5.0	1		
89377	Seal Cable Assy 5.0-6.4	1		
89378	Seal Cable Assy 6.4-8.5	1		
89379	Seal Cable Assy 8.0-9.5	1		
89373	Seal Cable Assy 9.5-11.0	1		
CABLE SEAL PLUG				
<i>CHOOSE ONE SIZE CABLE SEAL PLUG BELOW FOR STANDARD AIR STREAM</i>				
32906	Plug Seal for AirStream	1		
EXTRAS				
89214	OPTION BELT 4-16MM CABLE	2		
89434	DUCT ADAPTER 18MM TO 1" SDR	1		
70740	DUCT ADAPTER 18MM TO 26.6MM	1		




Tube Collet and Clamp Assemblies

Cable Seal Plug



Cable Guide Assemblies

Cable Seal Collet Assemblies




Drive Belts

Supplied With All Machines


- Air Stream Cable Blowing Machine
- Travel Case for Air Stream and accessories
- Toolkit
- Manual

Spare Tube Seals (5 Pack)	
89549	5mm
89553	7mm
89550	8-8.5mm
89551	10mm
89552	12-12.7mm
89555	14mm
89554	16mm
89558	18mm

Spare Cable Seals (5 Pack)	
89510	2.5-3mm
89511	3-3.8mm
89512	3.8-5mm
89513	5-6.4mm
89514	6.4-8mm
89516	8-9.5mm
89517	9.5-11mm

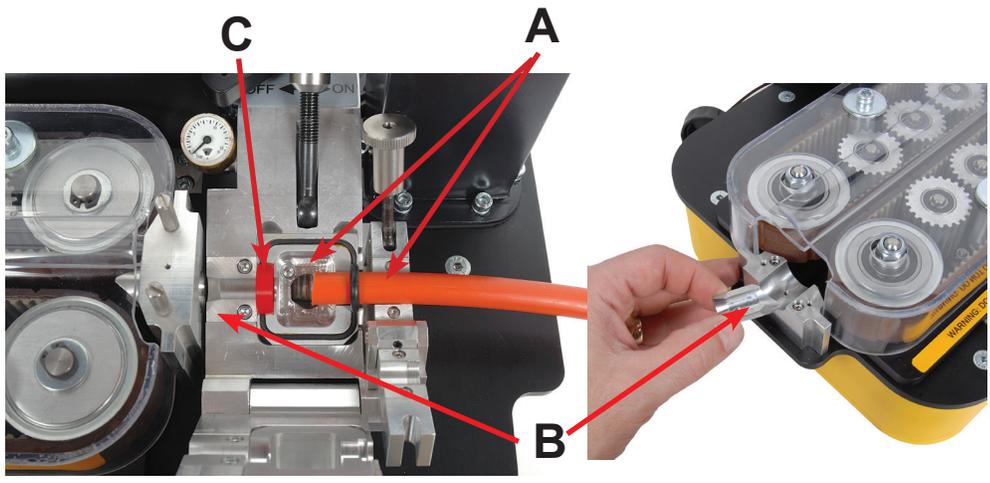

Flat Drop Kit
P/N 89328



Includes: 2 belts and collet for SST and Superior Essex

Cable Seal 3/pk

- 89504 SST Tenable
- 89505 SST Non-Tenable
- 89519 Superior Essex Non-Tenable

How To Chose Your AIR STREAM Component Kits

When choosing the Plus Model: (included in price)
Receive all components to blow the 3 most popular sizes

When choosing the Max Model: (included in price)
Nothing to pick, you'll receive one of everything

The standard belt set supplied with all AIR STREAMS is the 6-20mm. If you need a different size, order separately.



GENERAL MACHINE PRODUCTS (KT), LLC
3111 OLD LINCOLN HWY, TREVOSSE PA 19053
GMPTOOLS.COM 215.357.5500