
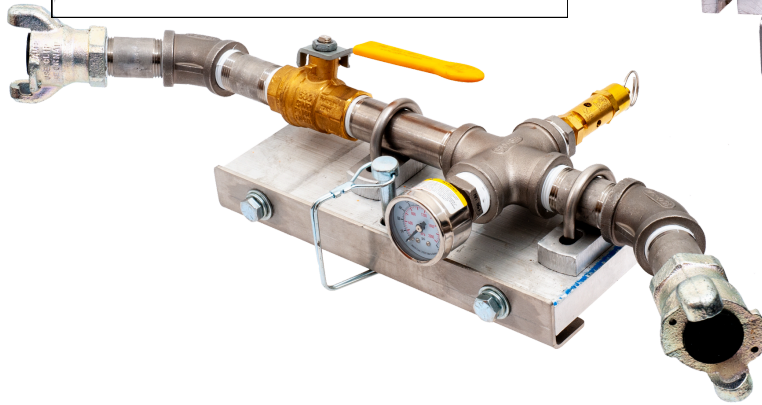



FIBER BLOWING AIRBOX TRAILER ATTACHMENT

Fiber Blowing Attachment makes capable fiber blowing reel trailers convert quickly to use a GMP Tornado airbox

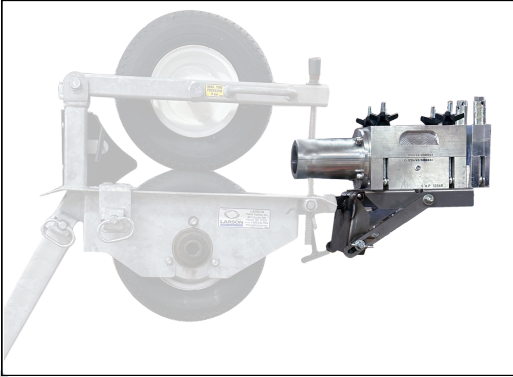

Air control valve attaches quickly to control panel on your trailer

Airbox and adjustable hitch style stand allows you to quickly setup the tool in a matter of a few minutes attaching directly to the fiber blowing trailer's figure 8 attachment

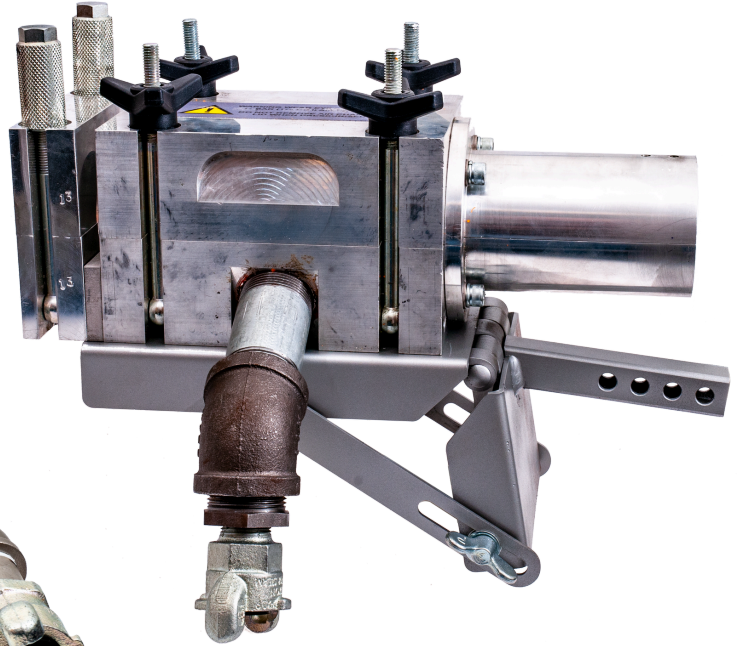

FEATURES AND BENEFITS

- The 1 inch square tube attachment to adapt to act as direct bolt in to existing fiber blowing trailers
- Converts existing fiber blowing trailers to be used with GMP Tornado airbox, duct clamps, cable guides and seals

WHAT'S INCLUDED

- 12- 24 mm Cable guides*
- Fiber cable blowing airbox
- Fiber blowing trailer adapter plate with adjustable distance and angle
- Air flow valve and pressure gauge assembly with standard 2 jaw air hose fitting
- Klein Modbox Storage case

*Contact GMP for additional sizes



Works with all existing GMP Tornado Duct Clamps and Seals

PN: 90070

SPECIFICATIONS

Operating Capacities

Cable Size: .47-94" (12-24mm) O.D. (call for more sizes)

Sub Duct Size: .75 - 2.00" SDR (12 - 63mm O.D.)

Pneumatic System

Air Hose Bore (min): 1 1/4" (32mm)

Operating Pressure: 175 psi (12 bar)

Flow:

The air supply should be filtered, cooled and dry. For Ducts with an Inner Diameter of: Minimum Flow Acceptable @175 psi (12 bar)

Dimensions - In Case

Height: 28"

Length: 20"

Width: 23"

Weight: 77 lbs

Dimensions - airbox assy

Height: 12"

Length: 12"

Width: 15" (17.5" with cable adapter)

Weight: 31.5 lbs*

**Cable adapter weight add 2.0 lbs*

Dimensions - air valve assy

Height: 4.25"

Length: 8.25"

Width: 20.5"

Weight: 9.5 lbs



Included is a sturdy roller storage box