

GentleAir Cable Blowing Machine

Now you can depend on the same GMP quality as our larger machines in a new smaller package... The Gentle Air uses compressed air to install the fiber. Coupled with the driven roller is a precision clutch that you can dial in your custom torque from zero to infinity. The rollers, powered by most types of cordless drills (not included), control the blown fiber as it is propelled into the microduct. An electronic monitoring system provides read-outs of speed and distance.

The design of the Gentle Air provides for quick and easy component changes for different cable or duct sizes. Its compact size and portable maneuverability make the Gentle Air ideally suited for external or in-building use.

Main Features:

- Installs cable diameters of 0.039" to 0.118" (1.0 to 3.0mm)
- Digital cable speed and length monitoring
- Accommodates microduct sizes of 4 to 7mm (OD)
- Integral air valve and pressure gauge
- Uses a fully adjustable precision clutch for torque control
- Low maintenance
- Uses most variable speed drills as a power source
- Lightweight, durable construction with precision machined parts
- Travel bag included
- Single person operation

P/N 89916 GentleAir Blowing Machine for round fiber
P/N 89901 Plus for round fiber (comes with 3 cable and seal sizes)

How To Chose Your Gentle Air Component Kits

When choosing the Base Model: (items priced individually)

- Pick 1 Tube and collet and clamp assembly
- Pick 1 Cable seal collet assembly


When choosing the Plus Model: (included in price)

Receive all components to blow the 3 most popular sizes

Supplied With All Machines

Gentle Air Cable Blowing Machine
 (2) 9V Lithium Batteries, Toolkit, Travel bag, Manual

Up to 30% savings on accessories when purchasing the Plus

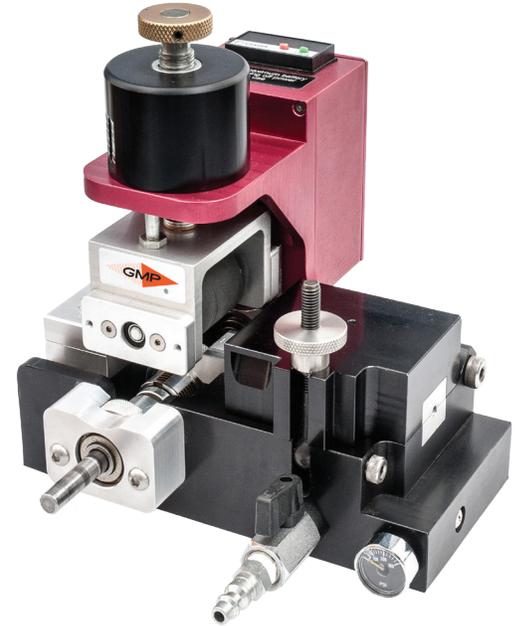


Specifications:

Cable Diameter: 0.039" to 0.118" (1.0 to 3.0mm)
Tube Size (Outside Dia): (OD) 0.158" to 0.275" (4 to 7mm)
Cable Speed (Adjustable): 0-300 ft/min (0-90m/min)
Max Air Pressure: 220 psi (15 Bar)
Power Requirement: Variable Speed Drill
Width: 8.1 in. (206mm)
Length: 9.7 in. (246mm)
Height: 8.5 in. (216mm)
Weight: Approx. (5.4Kgs Approx.)

P/N	COMPONENT		
TUBE COLLET AND CLAMP ASSEMBLIES			
<i>CHOOSE ONE SIZE BELOW FOR STANDARD GENTLE AIR</i>			
89918	4mm	1	
89919	5mm	1	
89926	7mm	1	
89927	8mm	1	
89920	8.5mm	1	
CABLE KIT SEAL COLLET ASSY			
<i>CHOOSE ONE SIZE DUCT SEAL BELOW FOR STANDARD GENTLE AIR</i>			
89898	2.0-2.5mm	1	
89899	2.5-3.0mm	1	
89929	1.0-2.0mm	1	

P/N	COMPONENT
SPARE TUBE SEAL O RING (5 PACK)	
89556	4mm
89549	5mm
89553	7mm
89550	8mm
89550	8.5mm
SPARE CABLE SEALS	
89509	2.0-2.5mm (5 PACK)
89510	2.5-3.0mm (5 PACK)
33087	1.1mm
33043	1.6mm
33425	2.0mm

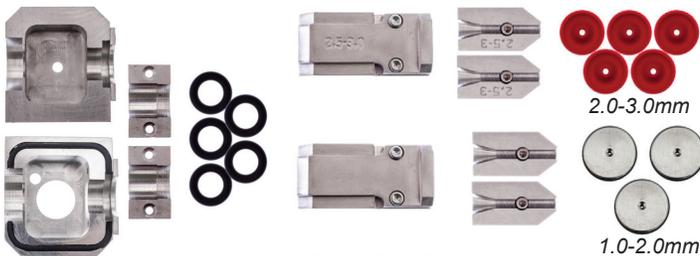

Tube Collet and Clamp Assemblies Cable Seal Collet Assemblies



*Unit powered by customer
supplied variable speed drill*

Accessories:



**Bottled Nitrogen Kit
P/N 89742**



**Drill Stand
P/N 89948**



**Tripod Mount
P/N 89945**



**Whisper Air Supply Hose
P/N 89949**