

# How to Install Your New...

## J2 LASHER GUARD

P/N 70012

### About Your Guard

This Lasher Guard is designed to protect your J2 Lasher from tree foliage and branches which otherwise might interfere with or damage your lasher.

The circular aluminum tube body has a hinged gate that opens to let the cable and strand pass through, then closes to provide 360° protection.

### Assembly Procedure

Locate the position of the two mounting holes. These two holes match the two pre-drilled holes on your lasher on either side of the cable opening, below the lip of the gear housing.


Place the guard with the **gate opening to the left** and against the front end of your J2 Lasher's front plate, making sure that both mounting holes in the guard line up with the pre-tapped holes on your lasher.

Ensure the gate opening is on the same side the front gate is mounted

Insert the bolts through their mounting holes and tighten firmly, using a wrench, without over tightening.

For more information and assistance, contact our Technical Support Hotline: 1-800-345-6009

**Note:** J2 Lashers with serial numbers 87-6374 and earlier are not pre-drilled and pre-tapped. You'll need to get a J2 Template Kit (P/N 70014) in order to mount your J2 Lasher Guard.

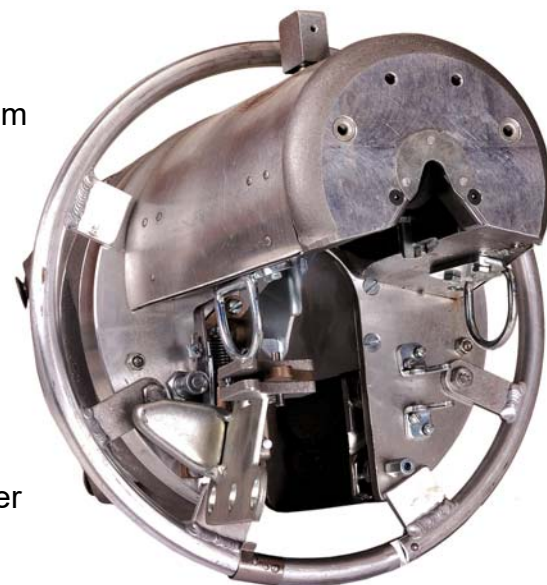

Insert the bolts through their mounting holes and tighten firmly using a wrench. **Do not over tighten.**



**GENERAL MACHINE PRODUCTS (KT), LLC**  
3111 Old Lincoln Highway, Trevose, PA 19053  
Tel: 215-357-5500  
Fax: 215-357-6216  
Email: [info@gmptools.com](mailto:info@gmptools.com)  
[www.gmptools.com](http://www.gmptools.com)