

# READ ME FIRST!

Important safety notes about your new tool...

GMP #75250  
3.375"  
RATCHETING CABLE  
CUTTER




- A. NEVER use this tool to cut steel, ACSR or electrically live wire. Severe or fatal injury may result.
- B. Capacity to 3.375" diameter max. (85mm) copper conductor communication cables.
- C. Tighten the fulcrum nut periodically and keep the handle bolt tight. **This tool will not operate unless the nut is torqued to at least 15 ft-lbs.**
- D. Keep the blades and mechanism clean and oiled. We recommend CRC SP-350 or an equivalent lubricant for this purpose.
- E. Keep the cutting edges sharp. Treat them as you would a good-quality knife. Periodically open the blades all the way and hone them as follows:



- Using a round India stone or round file, stone the wiping surface (1) flat near the edge.
  - Stone the 35° angle (2) to remove any nicks.
  - Stone very lightly on a 45° angle at (3) to remove burrs.
- F. If you encounter strong cutting resistance, use a one-click cutting cycle

## 75250 Ratcheting Cable Cutter Parts Identification

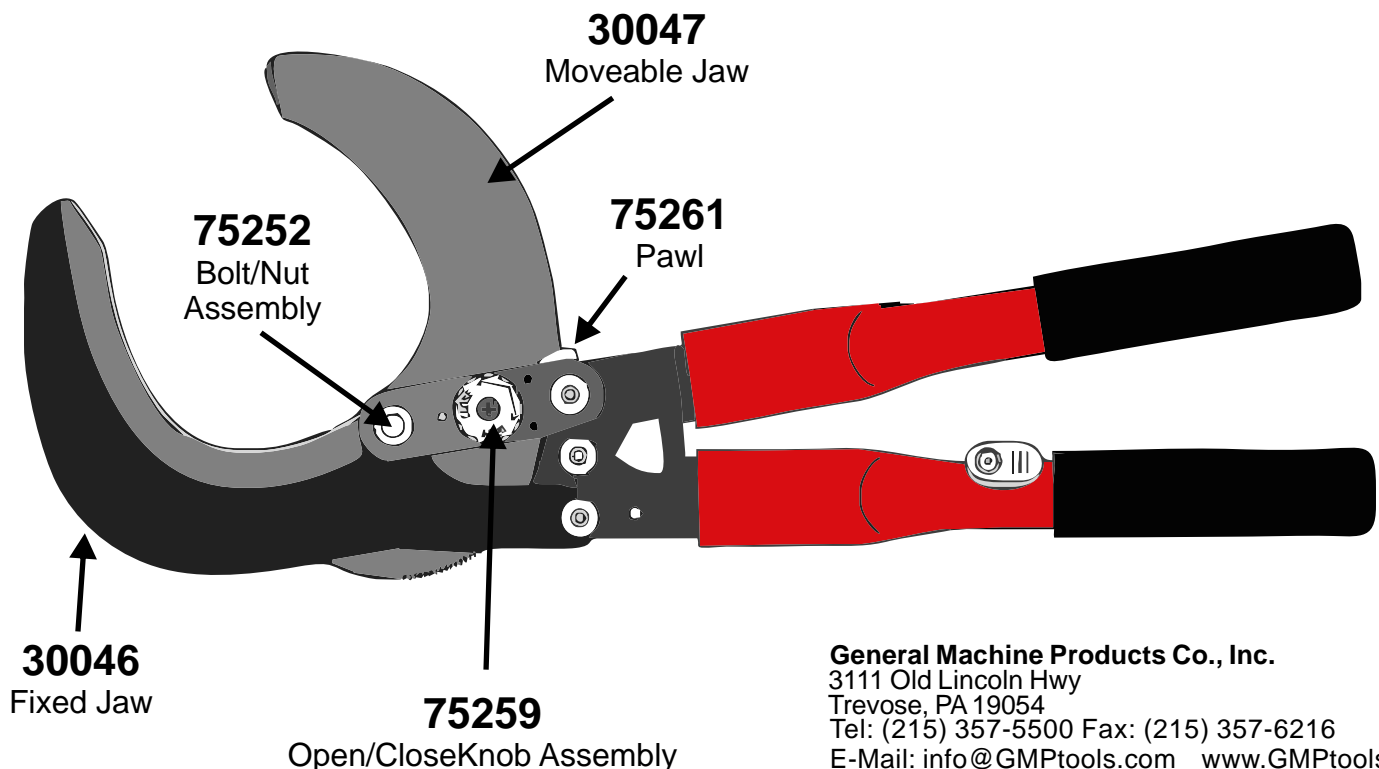

**General Machine Products Co., Inc.**  
3111 Old Lincoln Hwy  
Trevose, PA 19054  
Tel: (215) 357-5500 Fax: (215) 357-6216  
E-Mail: info@GMPtools.com www.GMPtools.com